




SOL[®] Coach Light

APPLICATIONS


Residential areas, streets, walkways and area lighting.

SPECIFICATIONS

- GE luminaire, engineered with compact fluorescent bulbs.
- Acrylic or polycarbonate resin refractors.
- Die-cast aluminum housing.
- Stainless steel latch to secure canopy.
- Hinged canopy.
- Prismatic and SOL Max-Lite Reflectors.

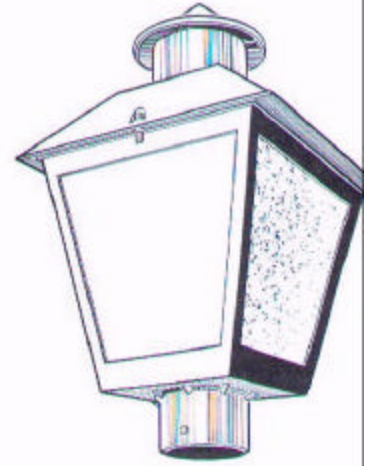

DIMENSIONS

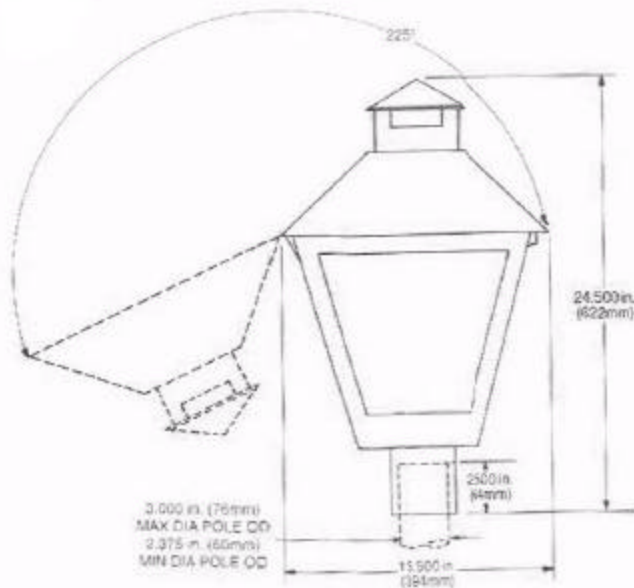

DATA

Approximate Net Weight - 12-18 lbs.
Effective Projected Area (EPA) - 1.6 sq. ft.
Suggested Mounting Height - 10-18 ft.

Consult factory to match bulb size with application.

INDEPENDENT TEST LAB PHOTOMETRICS AVAILABLE

Solar Outdoor Lighting, Inc., 3210 SW 42nd Ave., Palm City, FL 34990
Phone: 561-286-9461 Fax: 561-286-9616
On the web at www.solarlighting.com