




ACCESSORIES

ARMS • CONTROLLERS • LAMPS

TYPE


SPECIFICATIONS

Roadway - Fixed (AF)

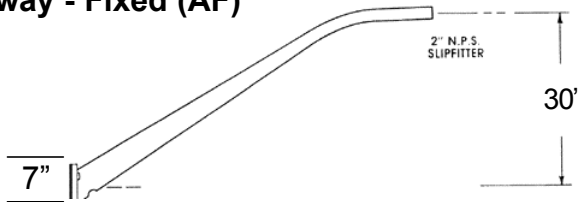


Aluminum Schedule 40
Tapered Elliptical
2" NPS Slipfitter
Weight - 15lbs
EPA (sq ft) 2.0

Roadway - Swivel (AS)

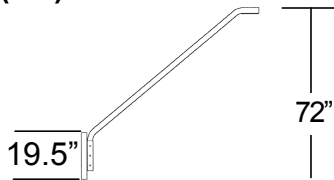

Aluminum Schedule 40
Can rotate up to 60 degrees
2" NPS Slipfitter
Weight - 16 lbs
EPA (sq ft) - 2.0

Parking Lot/Walkway - Short (AB)



Aluminum Schedule 40
Powder coating available
Weight - 8lbs
EPA (sq ft)- 0.7

Controllers - Run Times




Dusk To Dawn (DTD) - Adjust to One hour increments

Dusk To Predawn (DTP) - Selected Increments:

- 3 hrs. on/off/1hr. on
- 4 hrs. on/off/2 hrs. on
- 6 hrs. on/off/2 hrs. on

Lamps

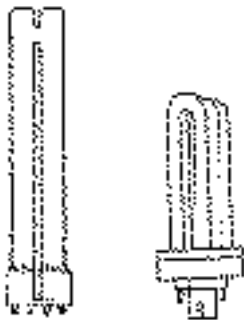

Wattage (watts)	(Code)	Design Lumens (lumens)	Power Consumption (amps)	Length (inches)
5	(5w)	250	.5	4.1
7	(7w)	400	.7	5.2
9	(9w)	600	.8	6.5
13	(13w)	900	1.2	7.0
18	(18w)	1250	1.2	9.0
18 Triple	(18T)	1200	1.5	4.6
18 LPS	(18LP)	1800	1.8	8.5
24	(24w)	1800	1.6	12.7
26 Triple	(26T)	1800	1.7	4.9
32 Triple	(32T)	2400	2.0	5.5
35 LPS	(35 LP)	4800	3.1	12.4
36	(36w)	2900	1.9	16.5
42 Triple	(42T)	3200	2.5	6.4

